



Electronics Line Panic (EL4711P) / Medical (EL4711M) Transmitter is a two-way single function transmitter used to signal a panic / medical alarm in the event of distress. By pressing the button on the panic transmitter, a digitally coded wireless signal is sent to the security panel and triggers an event or call for help. The Transmitter is compatible with the iConnect 2-way security system and is available in 433.92 MHz and 868.35 MHz frequency bands. This water-resistant transmitter can be as a pendant and is ideal for the elderly or disabled who might not be able to reach the phone in the event of an emergency.

Additional features include:

- Low battery and transmission LED indication
- Includes lithium battery with a 3-year battery life
- Includes a necklace (cord).

Registration

The EL-4711 must identify itself to the iConnect 2-Way receiver as follows:

1. Set the system to registration mode.
 - a. Go to the main menu and select [9]>[1]>[2] (Programming > Devices > Keyfobs)
 - b. Select a Keyfob (1-19) and press '√'.
2. Press the Keyfob button, making sure that the Keyfob's green LED lights up at the end of the process.

Note: A flashing red LED indicates a communication problem between the Keyfob and the system.

3. As soon as 'Save?' appears press '√'.
4. Set the Keyfob parameters as described in the installer instructions.

Note: During registration, maintain a minimum 1 meter distance between the keyfob and panel.



Deleting a Keyfob

To delete a Keyfob from the system:

1. Set the system to Delete mode.
 - a. Go to the main menu and select [9]>[1]>[2] (Programming > Devices > Keyfobs).
 - b. Select a Keyfob (1-19) and press '√'
 - c. Press >6 > √.
2. Press and hold the Keyfob button for at least eight seconds. The initial red LED flashing indicates the Keyfob is attempting to contact the system. After the flashing stops, a red/green flashing LED begins and when it stops, the keyfob unregistration has succeeded.

Battery Protection

A battery test is automatically repeated daily. If the battery is [very] low the amber LED will blink every five [seconds] minutes indicating that the battery must be replaced. A "Low Battery" message is also sent to the Programmable Receiver.

Technical Specifications:

Frequency:	868.35MHz *, 433.92MHz
Power:	3V Lithium Battery, Type CR2032
Caution:	Fire, explosion and severe burn hazard! Do not recharge, disassemble or heat above 100°C.
Current Consumption:	16mA (transmission), 0.2µA (standby)
RFI Immunity:	According to EN 50130-4
Operating Temperature:	0-60°C

*Complies with EN- Grade 2 Class II Power Supply Type C


LED Indication: Red/Green/Amber

Red: (fast flash for 4 seconds) indicates an outgoing transmission.


Green: indicates successful operation.

Amber indicates low battery.

Battery Replacement

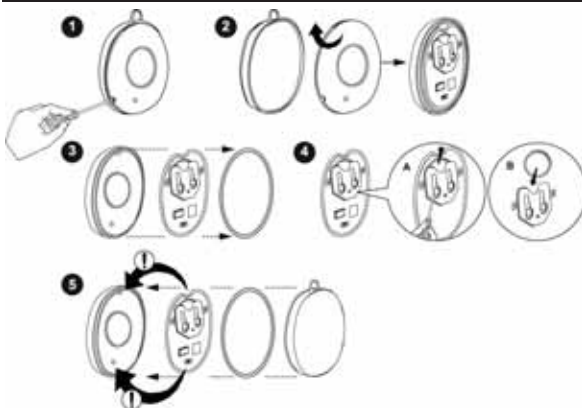

Inserting the Cord

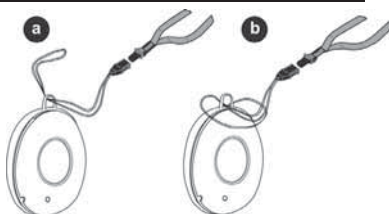

All data is subject to change without prior notice. In no event shall Electronics Line 3000 Ltd. (EL3K) be liable for an amount in excess of EL3K's original selling price of this product, for any loss or damage whether direct, indirect, incidental, consequential or otherwise arising out of any failure of the product. Hereby, Electronics Line 3000 Ltd. declares that this transmitter is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC

Electronics Line Limited Warranty

EL and its subsidiaries and affiliates ("Seller") warrants its products to be free from defects in materials and workmanship under normal use for 24 months from the date of production. Because Seller does not install or connect the product and because the product may be used in conjunction with products not manufactured by the Seller, Seller cannot guarantee the performance of the security system which uses this product. Seller's obligation and liability under this warranty is expressly limited to repairing and replacing, at Seller's option, within a reasonable time after the date of delivery, any product not meeting the specifications. Seller makes no other warranty, expressed or implied, and makes no warranty of merchantability or of fitness for any particular purpose. In no case shall seller be liable for any consequential or incidental damages for breach of this or any other warranty, expressed or implied, or upon any other basis of liability whatsoever.

Seller's obligation under this warranty shall not include any transportation charges or costs of installation or any liability for direct, indirect, or consequential damages or delay.

Seller does not represent that its product may not be compromised or circumvented; that the product will prevent any personal injury or property loss by burglary, robbery, fire or otherwise; or that the product will in all cases provide adequate warning or protection.

Seller, in no event shall be liable for any direct or indirect damages or any other losses occurred due to any type of tampering, whether intentional or unintentional such as masking, painting or spraying on the lenses, mirrors or any other part of the detector. Buyer understands that a properly installed and maintained alarm may only reduce the risk of burglary, robbery or fire without warning, but is not insurance or a guaranty that such event will not occur or that there will be no personal injury or property loss as a result thereof.

Consequently seller shall have no liability for any personal injury, property damage or loss based on a claim that the product fails to give warning. However, if seller is held liable, whether directly or indirectly, for any loss or damage arising under this limited warranty or otherwise, regardless of cause or origin, seller's maximum liability shall not exceed the purchase price of the product, which shall be complete and exclusive remedy against seller.

No employee or representative of Seller is authorized to change this warranty in any way or grant any other warranty.

WARNING: This product should be tested at least once a week.

Contacting Electronics Line



International Headquarters:

Electronics Line

14 Hachoma St., 75655

Rishon Le Zion, Israel

Tel: (+972-3) 963-7777

Fax: (+972-3) 961-6584

All rights reserved.

No part of this document may be reproduced in any form without prior written permission from the publisher.

