



1. Introduction:

CAM-GB2 color CCTV camera has been exclusively designed to be used on Golmar GB2 video door entry system. Golmar will not be responsible of the possible damages caused for an improper use or when used for other purposes than the specified.

2. Description:


CCTV camera with waterproof high resolution, low "lux" and 1/3" CCD element provides clear images even in low light conditions (day/night).

The adjustable mounting bracket allows the camera to be rotated 360° to enable viewing in virtually any position. The locking screws on the mounting bracket secures the camera after the viewing angle is adjusted.



3. Features:

- Extremely slim design make the camera easy to conceal.
- Auto white balance enables true color reproduction in varying light conditions.
- Outstanding video signal to noise ratio of 48 dB for a noise-free picture.
- Low power requirements ensure low heat and long life.

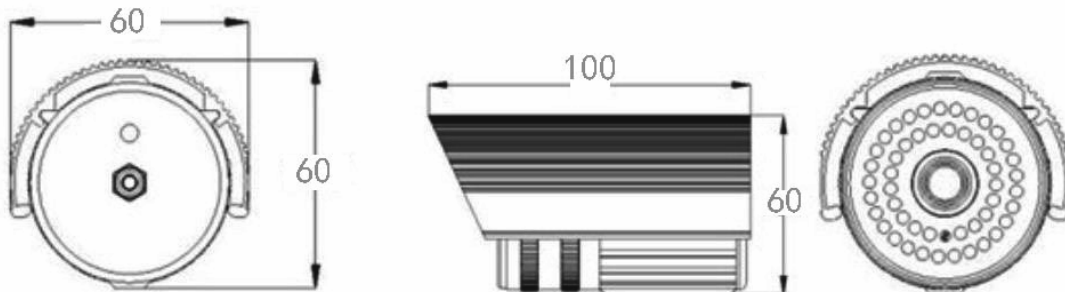

4. Specification:

Imaging element:	SONY CCD of 1/3", DAY/NIGHT
Lens:	3.6 mm, f 1.2
Lux:	0~0.05Lux/f1.2
Resolution:	420 TV Lines
System:	PAL/NTSC
S/N ratio:	>48dB
Video output:	1Vpp,75Ω
IR distance:	15m
Supply voltage:	24VDC
Power consumption:	300mA
Operation temperature:	-10°C~+40°C
Color:	Black
Wiring:	2 wires (non polarity) for GB2 system.
Dimension:	60(H) x 100(W) x 60(D)

IMPORTANT: For wiring see the TMM-GB2 and TD-CAM-GB2 manual.